




AC-XL is an industrial-grade oil additive specifically designed for use in cooling systems and which can improve BTU output by more than 20%. The AC-XL formula uses polarized refrigerant oil additive (PROA) technology to target the built-up oil layer in a cooling system, resulting in increased heat transfer and dramatically improved energy efficiency.

Increases BTU output
Improves energy efficiency
Extends compressor life

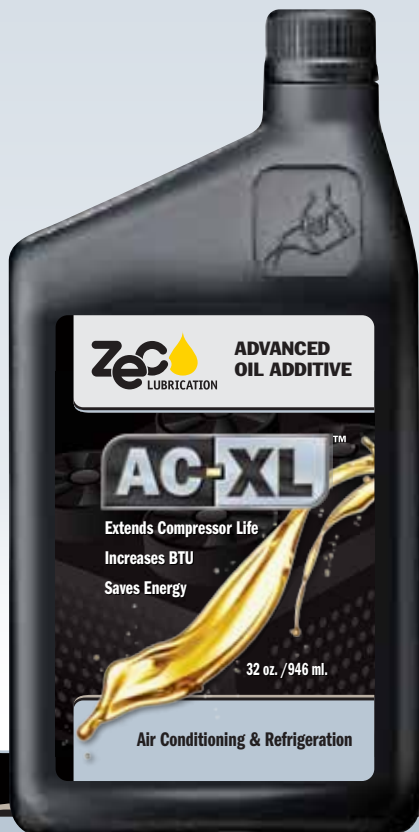

APPLICATIONS

- Air Conditioners and Refrigeration Units
- Heat Pump Systems
- Ammonia and Non-Ammonia Based Systems
- Residential and Commercial Applications

USAGE INSTRUCTIONS

To treat commercial air-conditioning or refrigeration systems, **AC-XL™** is added to the specified refrigeration system oil that lubricates the compressor motor. Once inside the AC/R system, **AC-XL** will continue to boost performance and provide protection for the life of the unit. Retreatment is only needed if you lose or replace the refrigeration oil or gas. **TREATMENT SHOULD ONLY BE APPLIED BY YOUR CERTIFIED AC/R TECHNICIAN.**

Visit www.zeclubrication.com to download full usage instructions

CAUTION: Keep out of the reach of children. Contains hydrocarbon derivatives. Flush eyes, wash skin with soap and water. If ingested do not induce vomiting and call a physician immediately.

AC-XL does not contain any chlorides, particulates, sulfur, heavy metal or PTFE. It is **GUARANTEED** not to change any tolerances or affect gasket materials. It also does not contain any toxic, flammable or hazardous material.

Contact support@zeclubrication.com or **1-855-863-5111** if you have questions.
1800 Woodward Dr., Ottawa, ON, K2C 0P7 / T: (613) 454-1870 · F: (613) 722-5889

www.zeclubrication.com